

PRODUCTION TESTING & FLOWBACK PRODUCT

COFLEXIP ARMORED STEEL HOSE

OVERVIEW

From the worldwide leader in flexible armored hoses Coflexip is manufactured to meet the rigors of the testing environment with successive layers of a stainless steel and thermoplastic to produce unique structures that have the strength and durability of steel pipes combined with the flexibility of reinforced rubber hoses. Each layer works independently from the others, as no vulcanization is used during manufacturing. This results in the structural stability of the pipe. Used in production testing for flow and kill lines, the hoses are Coflon® (type of plastic used within the hose) lined for higher temperature applications.

APPLICATIONS


- ▶ Onshore and offshore operations.
- ▶ Utilized in drillstem tests, well cleanup, and production tests.
- ▶ Rated for use in sour service.
- ▶ Non-vented choke and kill.
- ▶ Well intervention services.

FEATURES

- ▶ Multiple layers to provide pressure integrity and corrosion resistance.
- ▶ Available in sizes from 2" to 4".
- ▶ Available with different end terminations, from hammer union to flange.

BENEFITS

- ▶ Allows for simpler rig ups to the surface test tree;
- ▶ Eliminates multiple connections and possible leak points.
- ▶ Low maintenance.
- ▶ Absorbs vibrations and is corrosion free.

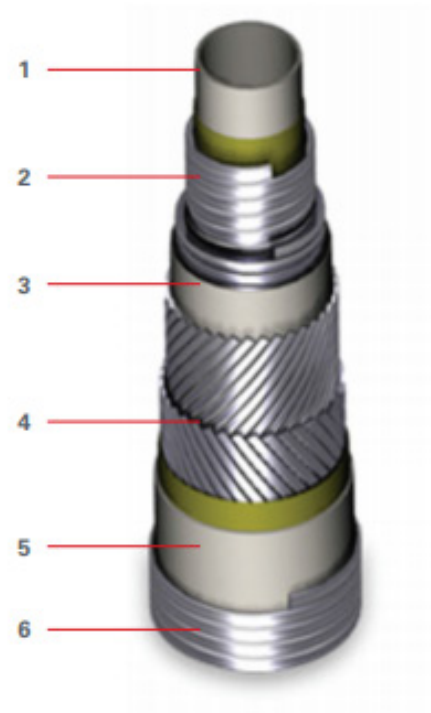

1. The thermoplastic inner tube makes the pipe leak-tight.
2. The carcass, with interlocked zeta and flat steel spiral pressure, resists internal pressure and external crunching loads.
3. The intermediate thermoplastic sheath is an anti-friction layer.
4. The double crosswound steel armors resist axial loads and protect the pipe from torsional strain resulting from handling and working conditions.
5. The thermoplastic outer jacket protects the armors from external corrosion.
6. The stainless steel outer wrap (SSOW) protects the pipe from mechanical impact, abrasion, weathering, and accidental mishandling.

PRODUCTION TESTING & FLOWBACK PRODUCT

COFLEXIP ARMORED STEEL HOSE

SPECIFICATIONS

MAWP	10,000 psig	15,000 psig
Temperature Range H₂X/HT	Coflon -4 to +256°F	Coflon -4 to +256°F
Service	H2S	H2S
Connection	API-6A flange	API-6A flange
Internal Diameter	2" / 3" / 4"	2" / 3"
Length	45', 55', 65', 100'	45', 55', 65', 100'
Weight	1,200 to 4,300 lbs	1,200 to 4,300 lbs
Basket Dimensions LxWxH	10' x 8' x 4'	10' x 8' x 4'
Minimum Bend Radius	3' to 5'	3' to 5'
Applicable Specifications	NACE MR-01-75 / API 6A / API 16C / API 17J / DNV	NACE MR-01-75 / API 6A / API 16C / API 17J / DNV

Standard Rislan (type of plastic used within the hose) Lines

-4°F to + 212°F (-20°C to +100°C)

High Temperature Coflon Lines

-4°F to + 266°F (-20°C to +130°C)

Carbon Dioxide

For 15,000PSI Hoses with temperature rating of 266°F (130°C) – CO₂+H₂S<10%

For 10,000PSI Hoses with temperature rating of 266°F (130°C) – CO₂+H₂S<30%

For 10,000PSI Hoses with temperature rating of 230°F (110°C) – CO₂+H₂S<50%



Contact us to learn more at: www.onetetra.com

Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Seller assumes no obligation or liability for the information in this document. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. Further, nothing contained herein shall be taken as a recommendation to manufacture or use any of the herein described materials or processes in violation of existing or future patents.